




More information on the website
radwag.com/en/info,w1,1Q6

C32.150.C3.M Multifunctional Scale

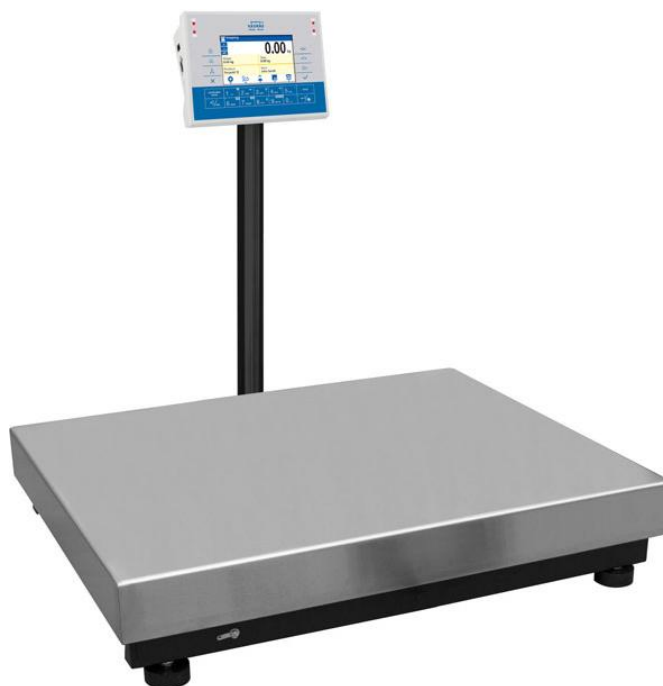

Functions



Labelling



Plus/Minus Control



Percent Weighing



Parts counting



Newton unit
measurement



Statistics



IR sensors



Under-pan weighing



GLP Procedures



Replaceable unit



ALIBI Memory

Datasheet

Metrological parameters	
Maximum capacity [Max]	150 kg
Minimum load	1 kg
Readability [d]	50 g
Tare range	-150 kg
OIML Class	III
Physical parameters	
Display	5" graphic colour

Physical parameters	
Weighing pan dimensions	700×500 mm
Packaging dimensions	850×800×270 mm
Net weight	23,4 kg
Gross weight	27,2 kg
Construction	
Communication interface	
Communication interface	2×RS232, USB-A, USB-B, Ethernet, 4 IN / 4 OUT (digital), Wi-Fi
Electrical parameters	
Power supply	100 ÷ 240 V AC 50 / 60 Hz and battery*
Power consumption max.	10 W
Operation time on batteries	operation time up to 5 h
Environmental conditions	
Operating temperature	-10 ÷ +40 °C
Weighing pan material	stainless steel AISI304



Accessories

Cigarette lighter receptacle power supply cables
Barcode scanners
Receipt Printer
Displays

Keypad, external switches
Stands, wall mounting kits and mounting brackets
RS 232, RS 485 cables
RS 232 cables (scale - EPSON printer)

Software

RAD-KEY
RADWAG Connect
R-LAB
E2R System

LabVIEW Driver
Label Editor R02
RADWAG Development Studio
R.Barcode

* Wi-Fi® is a registered trademark of Wi-Fi® Alliance.