



More information on the website
radwag.com/en/info,w1,XFF

WPT 150/H5/K Waterproof Scale



Functions

-  Plus/Minus Control
-  Percent Weighing
-  Totalizing
-  Parts counting
-  Internal battery
-  Peak hold
-  Newton unit measurement
-  Animal weighing

Datasheet

Metrological parameters	
Maximum capacity [Max]	150 kg
Minimum load	1 kg
Readability [d]	50 g
Tare range	-150 kg
Max readability for non-verified scale	5 g
OIML Class	III
Physical parameters	
Display	LCD (backlit)
Weighing pan dimensions	600×600 mm

Physical parameters	
Packaging dimensions	840×700×400 mm
Net weight	29,5 kg
Gross weight	31,8 kg
Protection class	IP 67 construction, IP 68 (1h max)/69 indicator
Communication interface	
Communication interface	RS232
Electrical parameters	
Power supply	100 ÷ 240 V AC 50 / 60 Hz and battery
Operation time on batteries	45 h (average time)
Environmental conditions	
Operating temperature	-10 ÷ +40 °C
Relative humidity	10% ÷ 85% RH no condensation

* Wi-Fi® is a registered trademark of Wi-Fi® Alliance.



Accessories

Receipt Printer
Granite Antivibration Tables
RS 232 – Ethernet Converter
Cigarette lighter receptacle power supply cables
Roller Table
AP2-3 Current Loop Unit


RS 232, RS 485 cables
Displays
RS 232 cables (scale - EPSON printer)
RS 232 cables (terminal - terminal)
Stands, wall mounting kits and mounting brackets
RS 232 – USB Converter

Software

RAD-KEY
LabVIEW Driver

Scales Editor
R-LAB

Device dimensions

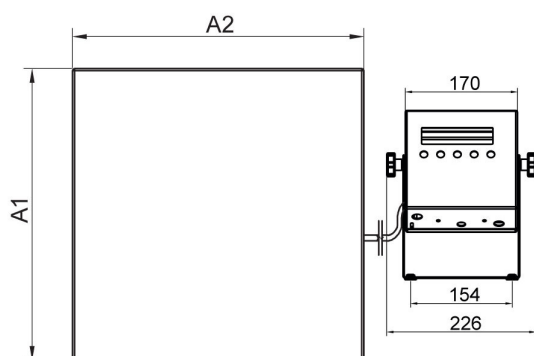

WPT H1/K - H6/K

	A1	A2	H	D	E
WPT H1	202	152	103 ±3	450	372
WPT H1/K	202	152	103 ±3	–	–
WPT H2	246	306	103 ±3	535	485
WPT H2/K	246	306	103 ±3	–	–
WPT H3	411	411	98 ±2	617	613
WPT H3/K	411	411	98 ±2	–	–
WPT H4	500	500	155 ±5	790	718
WPT H4/K	500	500	155 ±5	–	–
WPT H3/5	400	600	155 ±5	790	818
WPT H3/5/K	400	600	155 ±5	–	–
WPT H5	600	600	155 ±5	790	818
WPT H5/K	600	600	155 ±5	–	–
WPT H6	800	800	135 ±5	1100	1050
WPT H6/K	800	800	135 ±5	–	–