



More information on the website
radwag.com/en/info,w1,PL7

WPT 150/HR3/K Waterproof Scale With Stainless Steel Load Cell



Functions



Plus/Minus Control



Percent Weighing



Totalizing



Parts counting



Internal battery



Peak hold



Newton unit
measurement



Animal weighing

Datasheet

Metrological parameters	
Maximum capacity [Max]	150 kg
Minimum load	1000 g
Readability [d]	50 g
Tare range	-150 kg
Verification scale interval [e]	50 g
Max readability for non-verified scale	5 g
OIML Class	III
Physical parameters	
Display	LCD (backlit)

Physical parameters	
Weighing pan dimensions	410x410 mm
Packaging dimensions	670x510x330 mm
Net weight	15,5 kg
Gross weight	17,3 kg
Protection class	IP 68 construction, IP 68 cell, IP 68 (1h max)/69 indicator
Communication interface	
Communication interface	RS232
Electrical parameters	
Power supply	100 ÷ 240 V AC 50 / 60 Hz and battery
Operation time on batteries	45 h (average time)
Environmental conditions	
Operating temperature	-10 ÷ +40 °C
Storage temperature	-25 - +70 °C
Relative humidity	10% ÷ 85% RH no condensation
Construction	

* Wi-Fi® is a registered trademark of Wi-Fi® Alliance.



Accessories

Receipt Printer
Granite Antivibration Tables
RS 232 – Ethernet Converter
Cigarette lighter receptacle power supply cables
AP2-3 Current Loop Unit
RS 232, RS 485 cables


Displays
RS 232 cables (scale - EPSON printer)
RS 232 cables (terminal - terminal)
Stands, wall mounting kits and mounting brackets
RS 232 – USB Converter
Roller Table

Software

RAD-KEY
LabVIEW Driver

Scales Editor
R-LAB

Device dimensions

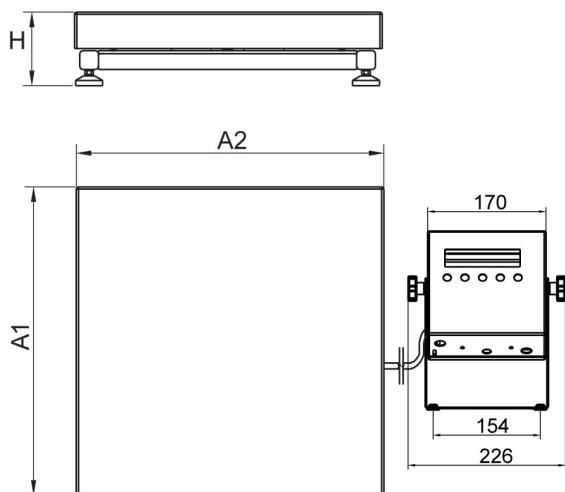

WPT HR/K

Scale type	A1	A2	H	D	E
WPT HR2	246	306	103 ±3	535	485
WPT HR2/K	246	306	103 ±3	–	–
WPT HR3	411	411	98 ±2	617	613
WPT HR3/K	411	411	98 ±2	–	–
WPT HR4	500	500	155 ±5	790	718
WPT HR4/K	500	500	155 ±5	–	–
WPT HR5	600	600	155 ±5	790	818
WPT HR5/K	600	600	155 ±5	–	–

dimensions in mm