



More information on the website
radwag.com/en/info,w1,ZK9

C315.4.1500.C8 Platform Scale



Functions



Plus/Minus Control



Percent Weighing



Totalizing



Parts counting



Internal battery



Peak hold



Newton unit
measurement



GLP Procedures



Animal weighing



ALIBI Memory

Datasheet

Metrological parameters	
Maximum capacity [Max]	1500 kg
Minimum load	10 kg
Readability [d]	0,5 kg
Tare range	-1500 kg
Max readability for non-verified scale	100 g
OIML Class	III

Physical parameters		
Display		LCD (backlit)
Weighing pan dimensions		1200×1200 mm
Weighing platform height		120 ±10 mm
Packaging dimensions		1300×1300×500 mm
Scale mass with indicator		110 kg
Protection class		IP 65 construction, IP 43 indicator
Communication interface		
RS232 Interface		1× standard, 1× option
Electrical parameters		
Power supply		100 ÷ 240 V AC 50 / 60 Hz and battery
Operation time on batteries		max 8h
Environmental conditions		
Operating temperature		-10 ÷ +40 °C
Relative humidity		10% ÷ 85% RH no condensation

* Wi-Fi® is a registered trademark of Wi-Fi® Alliance.



Accessories

Receipt Printer
 Stands, wall mounting kits and mounting brackets
 Cigarette lighter receptacle power supply cables
 Displays
 Ramps
 Frame for embedded scales



RS 232 – Ethernet Converter
 AP2-1 Current Loop Unit
 RS 232, RS 485 cables
 RS 232 – USB Converter
 RS 232 cables (scale - EPSON printer)
 RS 232 – RS 485 Converter

Software

RAD-KEY
 LabVIEW Driver
 R-LAB

RW Tool
 R Panel
 Scales Editor 2.0

Device dimensions

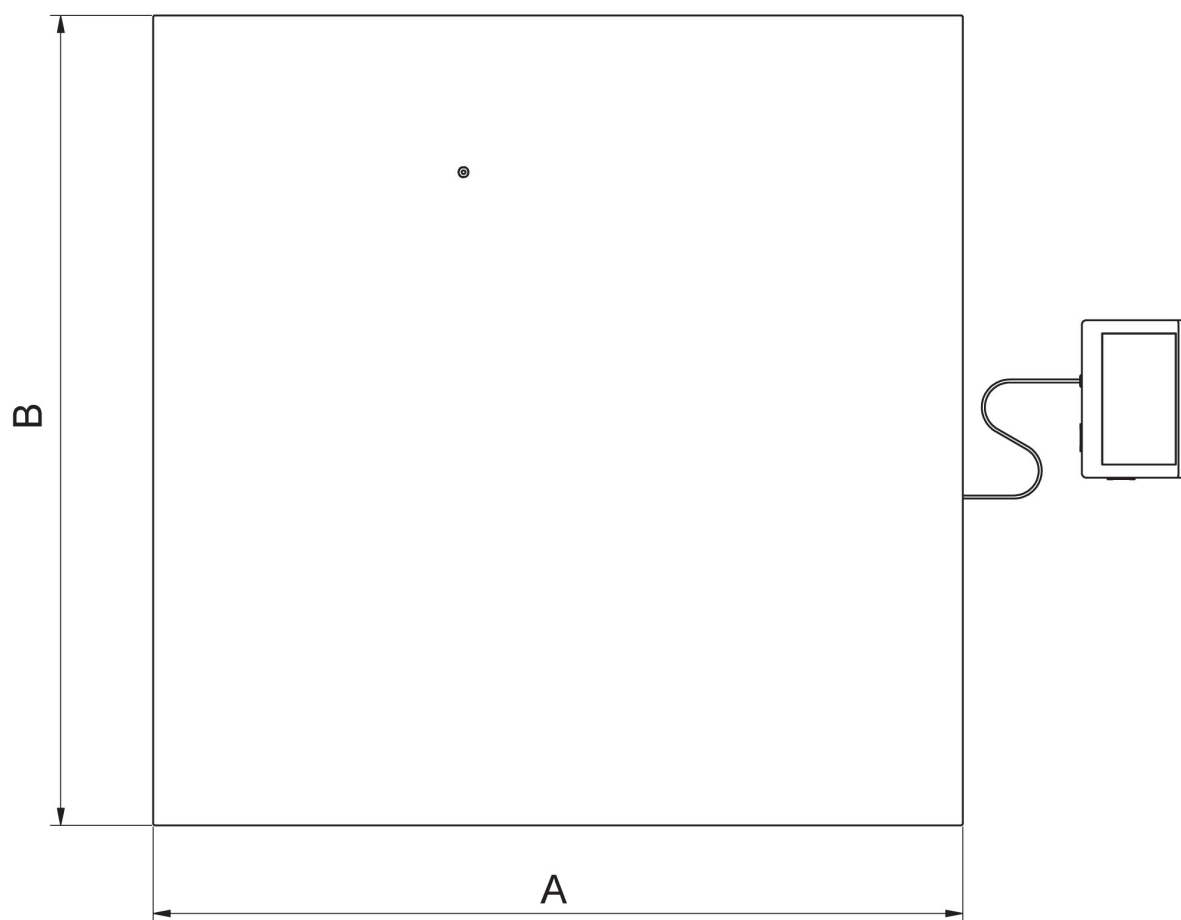

	A	B	H
C6	800	800	120 ±10
C7	1000	1000	120 ±10
C8	1200	1200	120 ±10
C8/9	1200	1500	120 ±10
C9	1500	1500	120 ±10
6000.C9	1500	1500	160 ±10