



More information on the website
radwag.com/en/info,w1,1TH

WPT/4N 600/1500 H2 Stainless Steel Ramp Scale



Functions



Plus/Minus Control



Percent Weighing



Totalizing



Parts counting



Internal battery



Peak hold



Newton unit measurement



Animal weighing

Datasheet

Metrological parameters	
Maximum capacity [Max]	600 / 1500 kg
Minimum load	4 kg
Readability [d]	200 / 500 g
Tare range	-1500 kg
OIML Class	III
Physical parameters	
Display	LCD (backlit)
Weighing pan dimensions	1100×1200 mm
Packaging dimensions	1500×1300×600 mm

Physical parameters	
Scale mass with indicator	150 kg
Protection class	IP 68 construction, IP 68 (1h max)/69 indicator
Communication interface	
Communication interface	RS232
Electrical parameters	
Power supply	100 ÷ 240 V AC 50 / 60 Hz and battery
Environmental conditions	
Operating temperature	-10 ÷ +40 °C
Relative humidity	10% ÷ 85% RH no condensation



Accessories

Receipt Printer
 RS 232 – Ethernet Converter
 Cigarette lighter receptacle power supply cables
 AP2-3 Current Loop Unit
 RS 232, RS 485 cables


Displays
 RS 232 cables (scale - EPSON printer)
 RS 232 cables (terminal - terminal)
 Stands, wall mounting kits and mounting brackets
 RS 232 – USB Converter

Software

RAD-KEY
 LabVIEW Driver

Scales Editor
 R-LAB

Device dimensions

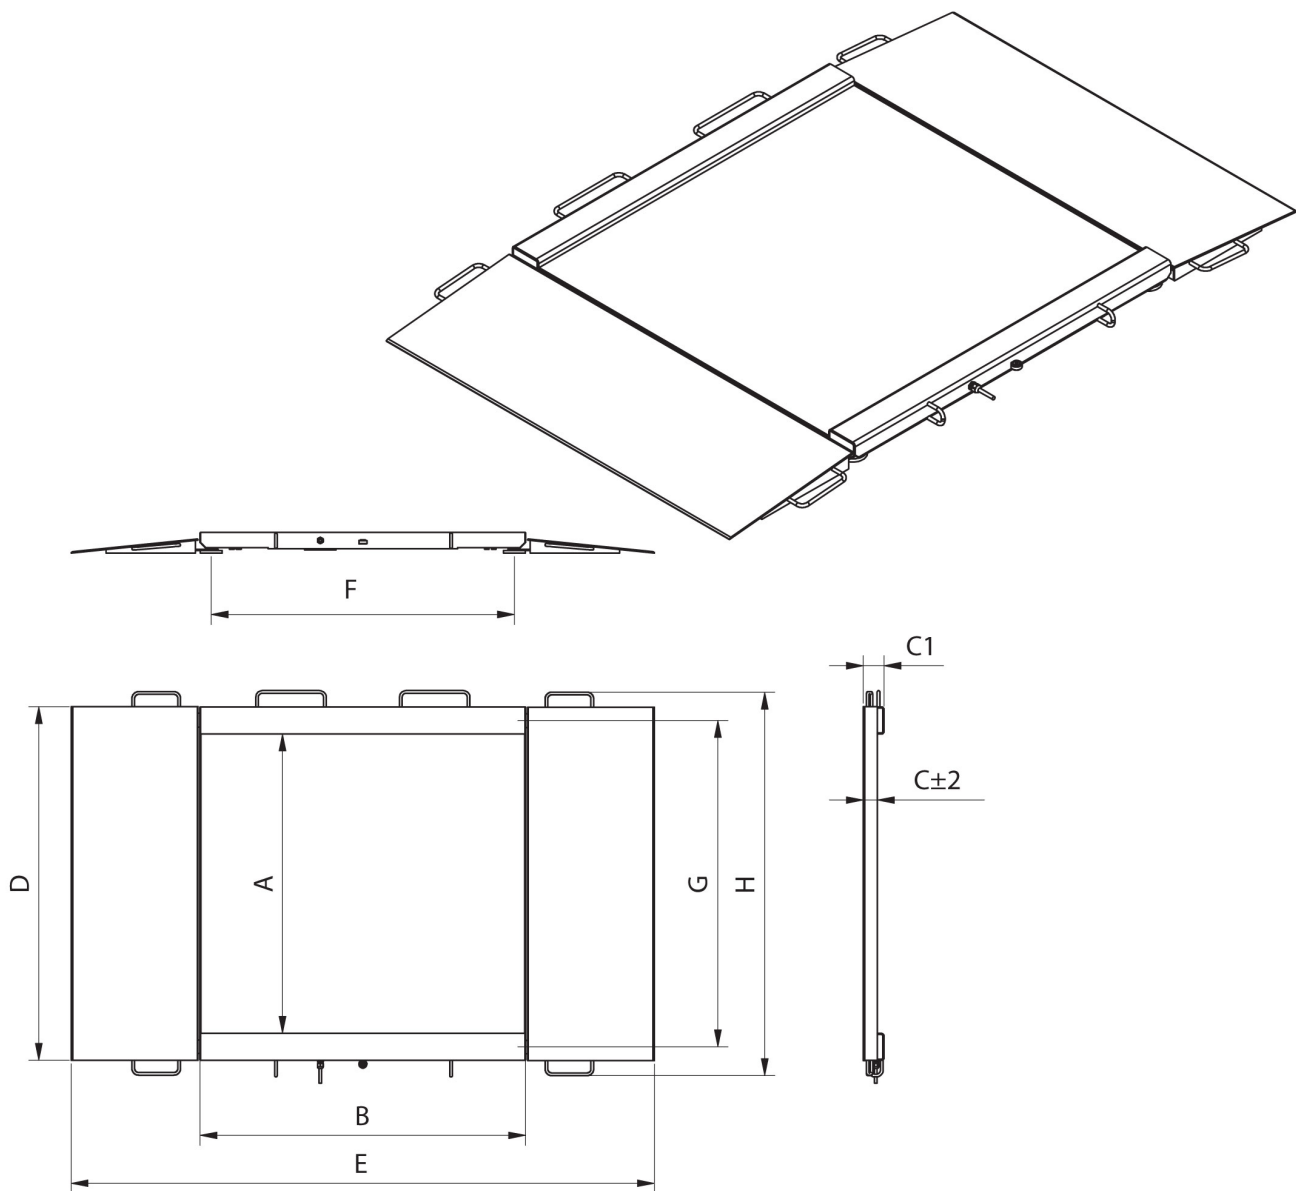

Model	Max	A	B	C	C1	D	E	F	G	H
WPT/4N 150 H1	150 kg	840	860	45,5	76	1040	1710	778	940	1170
WPT/4N 300 H1	300 kg	840	860	45,5	76	1040	1710	778	940	1170
WPT/4N 600 H1	600 kg	840	860	45,5	76	1040	1710	778	940	1170
WPT/4N 150 H2	1500 kg	1100	1200	45,5	76	1300	2050	1118	1200	1430
WPT/4N 300 H2	300 kg	1100	1200	45,5	76	1300	2050	1118	1200	1430
WPT/4N 600 H2	600 kg	1100	1200	45,5	76	1300	2050	1118	1200	1430
WPT/4N 1500 H2	1500 kg	1100	1200	52,5	76	1300	2150	1118	1200	1430
WPT/4N 300 H3	300 kg	1200	1500	45,5	76	1400	2350	1418	1300	1530
WPT/4N 600 H3	600 kg	1200	1500	45,5	76	1400	2350	1418	1300	1530
WPT/4N 1500 H3	1500 kg	1200	1500	52,5	76	1400	2450	1418	1300	1530
WPT/4N 300 H4	300 kg	1500	1500	52,5	76	1700	2450	1418	1600	1830
WPT/4N 600 H4	600 kg	1500	1500	52,5	76	1700	2450	1418	1600	1830
WPT/4N 1500 H4	1500 kg	1500	1500	52,5	76	1700	2450	1418	1600	1830